



AD Series™ Antenna Materials

AD250C™, AD255C™, AD260A™, AD300D™, AD320A™, and AD350A™ Laminate Materials

The AD Series™ antenna materials from Rogers Corporation are high performance, specialty materials that are specifically engineered and manufactured to meet the demands of today's wireless antenna markets. Increased antenna performance requirements are a constant trend in the market today. Rogers has the materials needed to meet the design needs of this market both today and into the future.

The AD Series antenna products are glass-reinforced, PTFE based materials that provide controlled dielectric constant, low loss performance, and very good passive intermodulation (PIM) performance. The woven glass reinforcement affords good circuit processability and enables high yield circuit board fabrication.

The AD Series antenna products are manufactured to meet the wide variety of dielectric constant options that are needed for today's antenna requirements. Dielectric constant options are available at 2.50, 2.55, 2.60, 3.00, 3.20, and 3.50 with a typical tolerance of ± 0.05 . The variety of options and tight control help to enable the circuit to meet the desired impedance every time.

All AD Series antenna products are manufactured with standard electrodeposited (ED) and reverse treated ED copper foil options. This provides choices that are sufficient to help reduce both circuit losses and antenna PIM. Typical PIM values using reverse treated ED copper foil are -159 dBc at 30 mil thickness and -163 dBc at 60 mil thickness. These are typical values obtained using the extensive PIM testing capability at Rogers at 1900 MHz using a two tone, reflected method on a 50 Ω microstrip test vehicle.

Additionally, the AD Series antenna products are produced in a wide variety of thicknesses. Some products such as the AD250™ laminate are available from 10 mils through 250 mils. Others are more selective and offer fewer options. Please consult with your sales engineer or customer service representative for assistance in selecting the material options that are suitable for your application.

Lastly, as PTFE based composites, the AD Series antenna materials have very low loss (typically less than 0.002 at 10 GHz), very low moisture absorption (less than 0.1%), and very high copper peel strength (greater than 10 pli).

These features combined together make the AD Series laminates an ideal choice for antenna applications.

Data Sheet

FEATURES AND BENEFITS:

Low loss tangent (<0.002 at 10 GHz)

- Excellent circuit performance in all typical wireless frequency bands

Controlled dielectric constant (± 0.05)

- Repeatable circuit performance

Very low PIM (-159 dBc at 30 mil, 1900 MHz)

- Excellent antenna performance and reduced yield loss due to PIM related issues


Excellent dimensional stability

- Repeatable circuit performance and improved manufacturing yields

TYPICAL APPLICATIONS:

- Cellular infrastructure base station antenna
- Automotive telematics antenna systems
- Commercial satellite radio antenna

Electrical Properties ⁽¹⁾	AD250C	AD255C	AD260A	Units	Test Conditions		Test Method
PIM (30mil/60mil) ⁽²⁾	-159/-163	-159/-163	-159/-163	dBc	Reflected 43 dBm swept tones at 1900 MHz, S1/S1		Rogers Internal 50 ohm
Dielectric Constant (process)	2.52	2.55	2.60	-	23°C @ 50% RH	10 GHz	IPC TM-650 2.5.5.5 (IPC TM-650 2.5.5.3)
Dielectric Constant (design)	2.50	2.60	2.65	-	C-24/23/50	10 GHz	Microstrip Differential Phase Length
Dissipation Factor (process)	0.0013	0.0013	0.0017	-	23°C @ 50% RH	10 GHz	IPC TM-650 2.5.5.5
Thermal Coefficient of Dielectric Constant	-117	-110	-148	ppm/°C	0°C to 100°C	10 GHz	IPC TM-650 2.5.5.5
Volume Resistivity	4.8 x 10 ⁸	7.4 x 10 ⁸	1.1 x 10 ⁹	Mohm-cm	C-96/35/90	-	IPC TM-650 2.5.17.1
Surface Resistivity	4.1 x 10 ⁷	3.6 x 10 ⁷	5.3 x 10 ⁷	Mohm	C-96/35/90	-	IPC TM-650 2.5.17.1
Electrical Strength (dielectric strength)	979	911	1072	V/mil	-	-	IPC TM-650 2.5.6.2
Dielectric Breakdown	>40	>40	>40	kV	D-48/50	X/Y direction	IPC TM-650 2.5.6
Thermal Properties ⁽¹⁾							
Decomposition Temperature (T _g)	>500	>500	>500	°C	2hrs @ 105°C	5% Weight Loss	IPC TM-650 2.3.40
Coefficient of Thermal Expansion - x	47	34	46	ppm/°C	-	-55°C to 288°C	IPC TM-650 2.4.41
Coefficient of Thermal Expansion - y	29	26	73	ppm/°C	-	-55°C to 288°C	IPC TM-650 2.4.41
Coefficient of Thermal Expansion - z	196	196	250	ppm/°C	-	-55°C to 288°C	IPC TM-650 2.4.41
Thermal Conductivity	0.33	0.35	0.34	W/mK	-	z direction	ASTM D5470
Time to Delamination	>60	>60	>60	minutes	as-received	288°C	IPC TM-650 2.4.24.1
Mechanical Properties ⁽¹⁾							
Copper Peel Strength after Thermal Stress	2.6 (14.8)	2.4 (13.6)	2.5 (14.3)	N/mm (lbs/in)	10s @288°C	35 µm foil	IPC TM-650 2.4.8
Flexural Strength (MD/CMD)	8.8/6.4 (60.7/44.1)	8.8/6.4 (60.7/44.1)	11.8/10.2 (81.4/70.3)	MPa (ksi)	25°C ± 3°C	-	ASTM D790
Tensile Strength (MD/CMD)	6.0/5.6 (41.4/38.6)	8.1/6.6 (55.8/45.5)	15.0/13.0 (103.4/89.6)	MPa (ksi)	23°C/50% RH	-	ASTM D3039/D3039-14
Flex Modulus (MD/CMD)	885/778 (6,102/5,364)	930/818 (6,412/5,640)	1,071/1,074 (7,384/7,405)	MPa (ksi)	25°C ± 3°C	-	IPC-TM-650 Test Method 2.4.4
Dimensional Stability (MD/CMD)	0.02/0.06	0.03/0.07	0.16/0.20	mils/inch	after etch + bake	-	IPC-TM-650 2.4.39a
Physical Properties ⁽¹⁾							
Flammability	V-0ity	V-0					

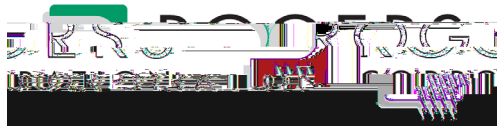

Data Sheet

Electrical Properties ⁽¹⁾	AD300D	AD320A	AD350A	Units	Test Conditions		Test Method
PIM (30mil/60mil) ⁽²⁾	-159/-163	-159/-163	-159/-163	dBc	Reflected 43 dBm swept tones at 1900 MHz, S1/S1		Rogers Internal 50 ohm
Dielectric Constant (process)	2.97/3.03 (2.94/3.00)	3.21	3.54	-	23°C @ 50% RH	10 GHz (1 MHz)	IPC TM-650 2.5.5.5 (IPC TM-650 2.5.5.3)
Dielectric Constant (design)	2.94/3.00	3.20	3.50	-	C-24/23/50	10 GHz	Microstrip Differential Phase Length
Dissipation Factor (process)	0.0021	0.0038	0.0033	-	23°C @ 50% RH	10 GHz	IPC TM-650 2.5.5.5
Thermal Coefficient of Dielectric Constant	-73	-98	-57	ppm/°C	0°C to 100°C	10 GHz	IPC TM-650 2.5.5.5
Volume Resistivity	1.7 x 10 ⁸	1.1 x 10 ⁹	1.5 x 10 ⁹	Mohm-cm	C-96/35/90	-	IPC TM-650 2.5.17.1
Surface Resistivity	5.1 x 10 ⁷	4.0 x 10 ⁷	9.5 x 10 ⁷	Mohm	C-96/35/90	-	IPC TM-650 2.5.17.1
Electrical Strength (dielectric strength)	750	748	671	V/mil	-	-	IPC TM-650 2.5.6.2
Dielectric Breakdown	46	35	33	kV	D-48/50	X/Y direction	IPC TM-650 2.5.6
Thermal Properties ⁽¹⁾							
Decomposition Temperature (T _d)	>500	>500	>500	°C	2hrs @ 105°C	5% Weight Loss	IPC TM-650 2.3.40
Coefficient of Thermal Expansion - x	24	27	18	ppm/°C	-	-55°C to 288°C	IPC TM-650 2.4.41
Coefficient of Thermal Expansion - y	23	36	18	ppm/°C	-	-55°C to 288°C	IPC TM-650 2.4.41
Coefficient of Thermal Expansion - z	98	93	63	ppm/°C	-	-55°C to 288°C	IPC TM-650 2.4.41
Thermal Conductivity	0.37	0.33	0.44	W/mK	-	z direction	ASTM D5470
Time to Delamination	>60	>60	>60	minutes	as-received	288°C	IPC TM-650 2.4.24.1
Mechanical Properties ⁽¹⁾							
Copper Peel Strength after Thermal Stress	3.2 (18.3)	2.2 (12.3)	2.6 (14.7)	N/mm (lbs/in)	10s @288°C	35 µm foil	IPC TM-650 2.4.8
Flexural Strength (MD/CMD)	152.4/127.6 (22.1/18.5)	14.2/12.9 (97.9/88.9)	14.2/9.0 (97.9/62.1)	MPa (ksi)	25°C ± 3°C	-	ASTM D790
Tensile Strength (MD/CMD)	122.0/120.7 (17.7/17.5)	14.3/12.8 (98.6/88.3)	14.2/6.7 (97.9/46.2)	MPa (ksi)	23°C/50% RH	-	ASTM D3039/D3039-14
Flex Modulus (MD/CMD)	10,400/9,580 (1510/1390)	1,496/1,481 (10,315/10,211)	1,835/1,469 (12,652/10,128)	MPa (ksi)	25°C ± 3°C	-	IPC-TM-650 Test Method 2.4.4
Dimensional Stability (MD/CMD)	-0.08/0.02	0.11/0.15	0.15/0.17	mils/inch	after etch + bake	-	IPC-TM-650 2.4.39a
Physical Properties ⁽¹⁾							
Flammability	V-0	V-0	V-0	-	-	-	UL-94
Moisture Absorption	0.04	0.08	0.1	%	E1/105 +D48/50	-	IPC TM-650 2.6.2.1
Density	2.23	2.41	2.43	g/cm ³	C-24/23/50	-	ASTM D792
Specific Heat Capacity	0.80	0.797	0.757	J/g°K	2 hours at 105°C	-	ASTM E2716
Product	Standard Thicknesses			Available Claddings			Standard Panel Sizes
AD300D	0.030" (0.762 mm) 0.040" (1.061 mm)	0.060" (1.524 mm) 0.120" (3.048 mm)		• ½ oz. (18µm), 1 oz. (35µm), 2 oz. (70µm) ED • ½ oz. (18µm), 1 oz. (35µm), 2 oz. (70µm) RT			12" x 18" (305mm x 457mm) 24" x 18" (610mm x 457mm)
AD320A	0.030" (0.762 mm) 0.031" (0.787 mm) 0.041" (1.041 mm)	0.062" (1.575 mm) 0.120" (3.048 mm) 0.250" (6.350 mm)		• ½ oz. (18µm), 1 oz. (35µm), 2 oz. (70µm) ED • ½ oz. (18µm), 1 oz. (35µm), 2 oz. (70µm) RT			12" x 18" (305mm x 457mm) 24" x 18" (610mm x 457mm)
AD350A	0.020" (0.508 mm) 0.030" (0.762 mm) 0.040" (1.016 mm)	0.050" (1.270 mm) 0.060" (1.524 mm) 0.090" (2.286 mm)	0.120" (3.048 mm) 0.125" (3.175 mm) 0.200" (5.080 mm)	• ½ oz. (18µm), 1 oz. (35µm), 2 oz. (70µm) ED • ½ oz. (18µm), 1 oz. (35µm), 2 oz. (70µm) RT			12" x 18" (305mm x 457mm) 24" x 18" (610mm x 457mm)

NOTES:
 (1) Typical values are a representation of an average value for the population of the property using a 0.060" laminate.
 (2) PIM Performance is heavily influenced by the copper choice. PIM values provided are typical values based on testing of the S1 foil using Rogers' internal test method on 0.030" thick and 0.060" thick laminates.
 Rogers recommends the customer evaluate each material and design combination to determine fitness for use over the entire life of the end product.

The information in this data sheet is intended to assist you in designing with Rogers' circuit materials. It is not intended to and does not create an arrangement, express or implied, including an arrangement of merchantability or fitness for a particular purpose or having the results shown on this data sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' circuit materials for each application.

The Rogers' logo, AD Series, AD250, AD255C, AD260A, AD300D, AD320A, AD350A and Helping power, protect, connect our world are trademarks of Rogers Corporation or one of its subsidiaries.

© 2018 Rogers Corporation, Printed in U.S.A.

All rights reserved. Issued 1406 121318 **PUB# 92-197**

Advanced Connectivity Solutions
100 S. Roosevelt Avenue, Chandler, AZ 85226
Tel: 480-961-1382 Fax: 480-961-4533 www.rogerscorp.com